

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



542 954

(43) International Publication Date  
19 August 2004 (19.08.2004)


PCT

(10) International Publication Number  
**WO 2004/069130 A1**

- (51) International Patent Classification<sup>7</sup>: A61J 3/00, A23G 3/20, B01J 2/00, B01F 9/00
- (21) International Application Number:  
PCT/IB2004/000296
- (22) International Filing Date: 3 February 2004 (03.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
BO2003A000050 6 February 2003 (06.02.2003) IT
- (71) Applicant (for all designated States except US): I.M.A. INDUSTRIA MACCHINE AUTOMATICHE S.P.A. [IT/IT]; Via Emilia Levante, 428-442, I-40064 Ozzano Emilia (IT).
- (72) Inventor; and  
(75) Inventor/Applicant (for US only): TREBBI, Roberto [IT/IT]; Via Forno Rosso, 2/3, I-40055 Castenaso (IT).
- (74) Agent: LANZONI, Luciano; Bugnion S.p.a., Via Goito, 18, I-40126 Bologna (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: A MACHINE FOR THE TREATMENT OF PHARMACEUTICAL PRODUCTS

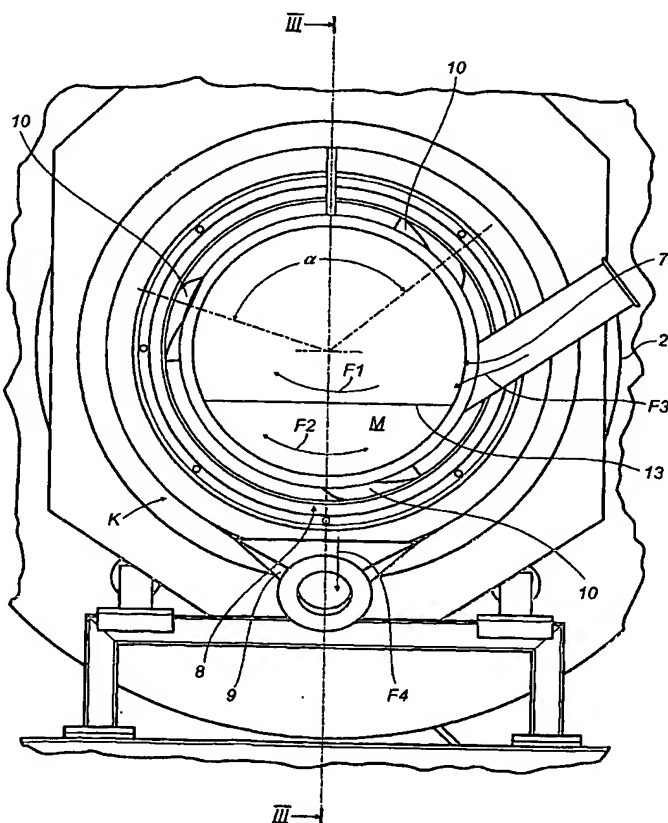

(57) Abstract: A machine (100) for the treatment of pharmaceutical products (P) comprises a pan (2) that revolves about an axis of rotation (X) and a dispensing unit (3) designed to disperse a coating material inside the pan (2) over a mass (M) of the products (P) located in the pan (2). The pan (2) has an opening (7) for feeding the products to be treated (P) into the pan (2), and an opening (8) for feeding the products (PT) already treated with the coating material out of the pan (2), the infeed opening (7) and the outfeed opening (8) being separate and independent of each other. A portion (K) of the inside surface of the pan (2) is equipped with at least one helical flow regulating fin (4, 5, 6) designed to facilitate inflow (F3) of the products to be treated (P) into the pan (2) during the feeding of the products (P) into the pan (2) through the infeed opening (7) when the pan (2) itself revolves in a first direction of rotation (F1), and to cause outflow (F4) of the treated products (PT) from the pan (2) during the outfeed of the treated products (PT) from the pan (2) through the outfeed opening (8) when the pan (2) itself revolves in a second direction of rotation (F2), opposite to the first direction of rotation (F1).

WO 2004/069130 A1



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*